Studio-in-a-box



The Quicklink Manager w

controllable HD studio productions and those looking o receive high quality broadcast streams from a contributor. Connecting o Quicklink's globally optimised I w latency infrastructure, the Studio-in-a-box delivers bi-directional video/audio between the contributor and broadcaster when used with a Studio Server.

The Studio-in-a-box solution is ideal or full remote

The Quicklink Manager will allow you to control your vision, lighting and sound f om any web browser and the Studio Server will provide your inputs/outputs to air. The Studio-in-a -box requires only an internet connection and is a simple one bu on operation

Product Highlights

- Inbuilt touchscreen 8.4" monitor to view local and studio output
- Inbuilt Panasonic pan/tilt/ oom camera (optional
- Full remote camera image adjustment
- Full 1080p
- Full duplex audio/video with ultra-low latency
- Full audio metering and level control
- Remote IFB


- Supports secondary HDMI output monitor
- Teleprompter supported via NDI/SDI
- Inbuilt lighting with emote controllable brightness
- DMX-512 lighting emote control (x5)
- Secure globally optimised I w latency network backbone
- Two-factor cloud based management portal
- Additional apacity to allow live streaming
- Rugged aluminium housing in a carry-on approved case

Everything you need in one compact solution, including anasonic PTZ Camera, microphone, headset and carry case. For full HD productions, eplacing the need for satellite or video circuits.



Contact: Enrico Pietrosanti, Via Remo La Valle, 105 - 00054 Fiumicino (Roma) - Italy Tel: +39 3406938456 - www.enricopietrosanti.com - info@enricopietrosanti.com www.quicklink.tv

Fully control and manage your contributors quickly, easily and efficiently.

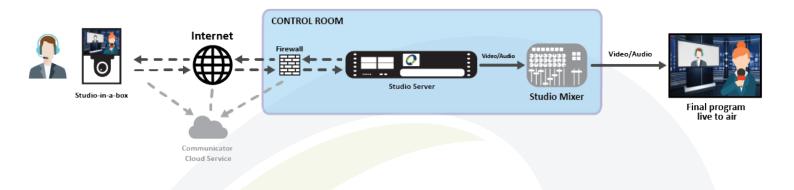

Technical Specifications

	Studio-in-a-box 1U	Studio-in-a-box
10-bit SD/HD-SDI Video	In/Out	In
HDMI Video and Audio Input	In/Out	In/Out
XLR, Analogu <mark>e audio Input</mark> /Output	✓	
AES/EBU Audio Input/Output	✓	
Talkback - IFB from Studio	✓	~
NDI [™] Video over IP. Dante/ Livewire+ AES67 Audio over IP Support	✓	✓
Genlock/ <mark>Sync Referen</mark> ce input	✓	
8.4" LCD touchscreen		1
Panasonic PTZ Camera with remote control (AW-HE40)		1
DMX lighting ontroller (5 lights)	✓	√
Included microphone, earpiece and carry case		√
USB 3.0 ports	4	4
Ethernet ports	2	2
3.5mm unbalanced stereo jack input	✓	√
3.5mm line out/earpiece	\checkmark	√
4G/LTE supported by USB dongle	✓	√
Inbuilt Wi-Fi		√
Power Supply	110-240v	12v (via 110-240v power supply)
Size: 480mm (W) x 44mm (H) x 250mm (D)	√(1U)	
Size: 220mm (W) x 300mm (H) x 190mm (D)		✓
Weight	4.2kg	4.5kg

Subject to change without notic



Contact: Enrico Pietrosanti, Via Remo La Valle, 105 - 00054 Fiumicino (Roma) - Italy Tel: +39 3406938456 - www.enricopietrosanti.com - info@enricopietrosanti.com www.quicklink.tv